

Gillison's



GVF HEDGERS, TOPPERS AND SKIRTERS

Manufacturer of Quality Farm Equipment Since 1977

Standard Features Include:

- Heavy tubular steel construction with rigid tractor mount.
- Electric/Hydraulic controls for ease of installation and operator comfort.
- Equipped with independent self contained hydraulic system.
- Standard hydraulic breakaway protection for hedging.
- Cutting heads can be set along side of tractor for transporting.
- Recommended cutting capacity of up to 1 1/2" diameter limbs.
- Proven dual sickle drive system.
- Any cutter bar length available from 2' to 15'
- 1 year warranty

Equipment that will top or hedge:

Cherries	Pears
Peaches	Olives
Apples	Raspberries
Nut Trees	Prunes
Citrus	Grapes
Coffee	Oleander
Lychee	Longan



Dual Hedger



Grape Hedger
and Cane Positioner



Standard Topper-Hedger



Pecan Hedger




Loader Mount Hedger



Double Topper-Hedgers



3 Point Skirter

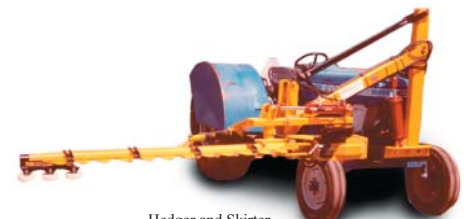

Hedger and Skirter


Gillison's Variety
Fabrication, Inc.



Topper-Hedger



Double Topper-Hedger



Pecan Topper-Hedger



Dual Hedger



3 Pt. Skirter



Hedger and Skirter



Grape Hedger and Cane Positioner



Loader Mount Hedger

	Topper-Hedger	Double Topper-Hedger	Pecan Topper-Hedger	Dual Hedger	3 Pt. Skirter	Hedger and Skirter	Grape Hedger and Cane Positioner	Loader Mount Hedger
Type of independent, self contained hydraulic system	Dual	Dual	Triple	Dual	Dual	3 Pt. Skirter	Grape Hedger and Cane Positioner	Loader Mount Hedger
Break away protection	None	None	None	None	None	Standard	None	Optional
Movement of cutter head	360° Rotation Side shift to 4'	360° Rotation Side shift to 4'	360° Rotation (self leveling head) Side shift 4'	360° Rotation (self leveling head) Side shift 4'	Tilt & Slide	Tilt 110°	Lift, tilt & side shift	Lift & tilt (optional 3' movement in & out)
Standard cutter bar length	10' (any length from 2' to 15' available as option)	10' (any length from 2' to 15' available as option)	12' (any length from 2' to 15' available as option)	10' with 3' lower bar extension (any length from 2' to 15' available as option)	7' (any length from 2' to 15' available as option)	7' (any length from 2' to 15' available as option)	4'	7' (any length from 2' to 15' available as option)
Topping & hedging capabilities	18' topping	20' topping of 2 rows	Side hedge to 36', top hedge to 24'	Widths: 2' - 4', 4' - 8', 5' - 11' (custom widths available)	Skirt as low as 12"	Side hedge to 12' (with 7' bar) Skirt as low as 12" Flat top 6'	9'	Max height determined by loader's max height
Cutting capabilities	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	1 1/2"	3/4"	1 1/2"
Mount type	Rear, custom mounted frameworks, easily dismounts from tractor.	Rear, custom mounted frameworks, easily dismounts from tractor.	Rear, custom mounted frameworks, easily dismounts from tractor.	Front, custom mounted frameworks, easily dismounts from tractor.	Rear	Front	Front	Loader
Safety lock systems on hydraulic functions	Standard	Standard	Standard	n/a	n/a	n/a	n/a	n/a

Sold & Serviced By: