



Gillison's Variety Fabrication, Inc.

Manufacturers of quality farm equipment since 1977.

GVF 4000 ROUGH TERRAIN FORKLIFT

The **GVF 4000** forklift is a compact, fast machine designed for working in narrow rows and tight spaces. It's rugged and operates smoothly. It's small - yet it has all of the features, power and speed of the larger GVF lifts.


NEW UPGRADES!

- Now only 65" wide!
- Improved turning radius, 15° tighter than our previous model.
- Kohler, Tier IV, Turbo Diesel Engine
- 4 wheel drive
- See through mast
- 42" carriage with 6 rollers
- 8" side shift in carriage
- Independent power assisted braking which allows operator to use the brakes for turning and decreases pedal effort required for braking which results in better performance and less operator fatigue.
- Hood flips up 90° & side panels easily remove for servicing.
- 4 flood lights - 2 front, 2 rear
- LED direction indicator lights
- LED warning flasher lights
- Backup alarm
- Horn
- SMV emblem
- Tilt and telescoping steering column
- Suspension seat
- Engine pre-cleaner
- Grid heater for cold start
- Down exhaust
- Rear view mirror
- 4 section hydraulic valve
- Painted with high quality urethane paint

Options:

- Rear fenders
- Warning beacon
- Bin clamp
- Bin dumper
- Transmission brake
- Load backrest
- Soft ride kit



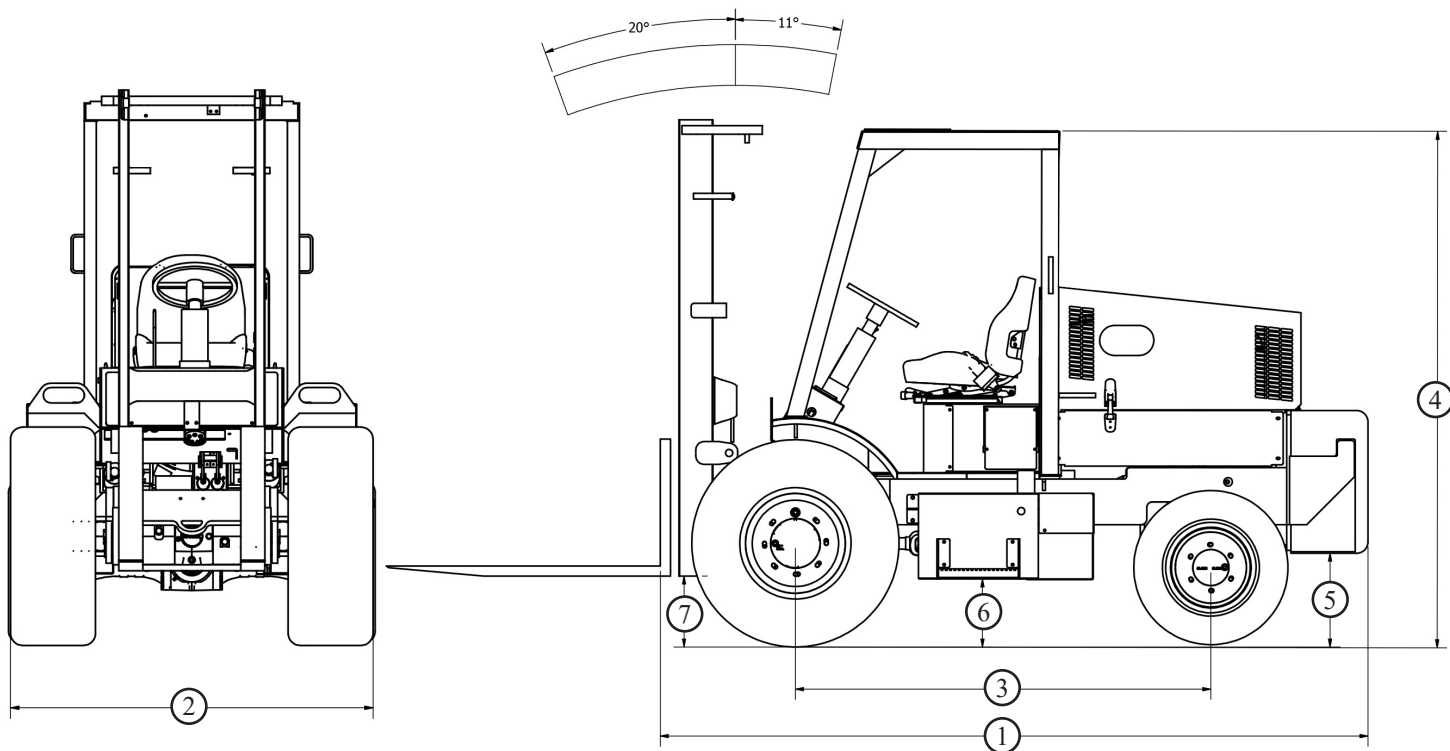

SPECIFICATIONS	Drawing Reference Number	GVF 4000
Overall length (without forks)	1	10' 8"
Overall width	2	65"
Wheel base	3	72"
Height to top overhead guard	4	90"
Clearance under counterweight	5	16.5"
Transmission clearance	6	12"
Clearance under mast	7	12"
Weight		9,100 lbs.
Lift capacity @ 24" load center		4,000 lbs.
Mast tilt forward		20°
Mast tilt rearward		11°
Mast side shift		8"
Outside turning radius		8.5'
Standard lift height		10'
Travel speed		20 MPH
Tire Size	Drive: 15-19.5 Steer: 10-16.5	
Steering	Load sense power steering 2.5 turns lock to lock	

Engine Manufacturer & Model	Kohler, Tier IV, Turbo Diesel Engine, 72 HP
Cylinders	4
Fuel system	Electronic Common Rail
Engine gross HP	72 @ 2400 RPMs
Peak torque	221 lb/ft @ 1500 RPMs
Start aid cold weather	Grid heater
Transmission	<ul style="list-style-type: none"> • 3-speed power shift • Power shuttle • Hydraulic disconnect 4WD-2WD
Fuel tank capacity	17 gallons
Front Axle	<ul style="list-style-type: none"> • Service Brake :Hydraulic wet disc with turning brakes. • Parking Brake: Spring applied hydraulic release. • Differential Lock: Hydraulic applied
Rear Axle	4WD, 20° oscillation
Hydraulic pump	16 GPM @ 2400 RPMs
Control valve	4 section, 1 aux
System pressure	2500 psi
Electrical	
Voltage	12 volt
Alternator	100 amp
Battery rating	800 cca



Gillison's Variety Fabrication, Inc.